

TA50

Micro DC Brushless Pump

Typical Applications

- Car Engine Cooling Circulation
- Car Engine Pre-heating
- Heating System (Car Auxiliary Heaters, Parking Heaters)
- Electric Vehicles Water Circulation System
- Normal Hot Water Circulation
- Liquid Transfer
- General Purpose Pumping




Specification

Model	Product Code	Max Flow Rate (L/Min)	Max Water Head (M)	Voltage (VDC)	Current (A)	Power (W)
TA50	TA50-R12-2302	23	2.5	12	1.25	15
	TA50-R24-2303	23	3	24	0.75	18

Note: Temperature range -40°C~125°C 2. Customization: /FG (RPM) signal wire

Curve & Dimension

TA50 Performance

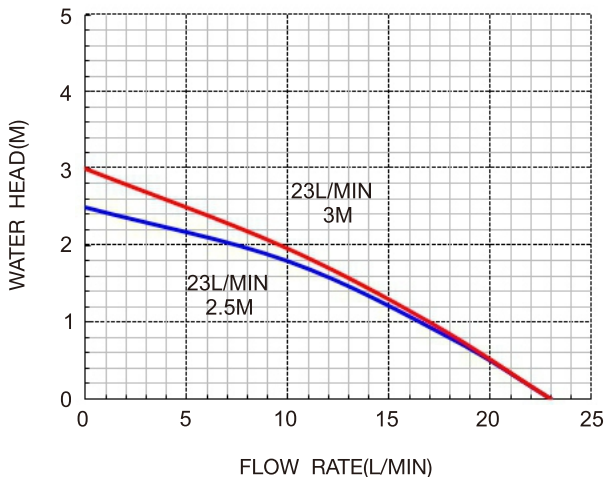

Dimension (mm)

